HARDWARE & STREAMING PACKAGE

DESIGN • BUILD • INSTALL • STREAM



NEW • AXIS Q6086-E INSIDE

4MP COASTAL CLEAN LENS PACKAGE

4MP PTZ CAMERA + PATENTED SELF-CLEANING X|CLEAR ENCLOSURE + 1 YEAR OF HDONTAP LITE STREAMING

ANY SCREEN. ANY DEVICE. STREAMING SERVICES REDEFINED.

HARDWARE ARRIVES TESTED AND READY FOR INSTALLATION

Your hardware package is **pre-built, pre-configured & tested** prior to shipping! Rest easy knowing that your HDOnTap coordinator has done the legwork, and your equipment is ready for an **easy installation**. HDOnTap representatives are available for assistance during your installation and setup, ensuring a **quick and easy process**.

RELY ON OUR SUPPORT AND EXPERTISE

HDOnTap Support is just a click or call away during your installation and beyond. In addition to **live support**, our **online knowledge base** is available whenever you are. Ensure you are capitalizing on your investment with our **post-integration live stream review** and get helpful marketing tips to realize the full potential of your live cam.

MARKETING TOOLS THAT INCREASE YOUR VISIBILITY

Stream your live cam with HDOnTap and enjoy **additional savings**! In addition to standard streaming features such as **watermark overlay** and **video ad inserts**, HDOnTap's proprietary streaming service includes **real-time snapshots**, **anti-stream hijacking security**, **automated time-lapse creation** and much more!



ENGAGE YOUR AUDIENCE WITH CRYSTAL-CLEAR LIVE STREAMS

The Coastal Clean Lens Package is the perfect solution for seaside hotels, marinas, beaches... anywhere with damp or salty air. Combat grime and salt build-up with our patented self-cleaning camera enclosure while you focus on the most compelling angle for your viewers.

GET STARTED TODAY: (858) 481-4096 • HDONTAP.COM

PACKAGE INCLUDES:

4MP PTZ CAMERA

- Axis Q6086-E 4MP PTZ Camera
- **2688 × 1512 px Resolution**
- 34x Optical Zoom with Laser Focus
- Up to 60 fps, 1/2″ Sensor
- Day/Night Mode - Manual or Auto

X|CLEAR CAMERA ENCLOSURE

- Patented Self-Cleaning Dome
- Polycarbonate Construction - No Rust or Corrosion
- 40x Plus Optically Pure Dome Lens
- Easy Mounting System w/ Precision Leveling and Adjustment

1 YEAR LITE STREAMING PLAN

- 4,000 Viewer Hours / Month
- Up to 2 Webcams
- Desktop & Mobile Streaming
- Anti-Stream Hijacking Security
- Logo Overlay & Social Sharing Player

HARDWARE:	$7,123 MSRP
STREAMING:	$3,348 MSRP
PACKAGE PRICE:	**$8,149**
SAVINGS OF 22%:	$2,322

IP Video Specialists, Inc. dba HDOnTap | 2120 Jimmy Durante Blvd #123, Del Mar CA 92014 | hdontap.com | sales@hdontap.com | 858.481.4096

THE CAMERA

AXIS Q6086-E 4MP PTZ

2688 × 1512 px Resolution



The Axis Q6086-E is built for great light sensitivity, so your coastal view stays bright and colorful from sunrise to dusk. Its extremely light-sensitive 1/2″ sensor, **34x optical zoom** and **laser focus** let viewers sweep the whole coastline, then zoom in on a breaking wave or a passing boat with sharp focus every time. Lightfinder 2.0 and Forensic WDR keep colors true in glare and near darkness, and it comes with a 5-year Axis warranty.


KEY CAMERA SPECS

RESOLUTION	2688 × 1512 (4MP)
SENSOR	1/2″ progressive scan CMOS
FIELD OF VIEW	Horizontal 61.5° (wide) to 2.0° (tele)
WDR	Forensic WDR, up to 120 dB; Lightfinder 2.0
PRESETS & TOURS	300 presets; guard tour (max 100); tour recording (max 10, up to 16 min each)
OPERATING TEMP.	-50 to 55°C (-58 to 131°F) at full power with 60 W midspan
FRAME RATE	Up to 50/60 fps (50/60 Hz) in all resolutions
LENS	Varifocal 6.64–225.5 mm; 34x optical zoom (12x digital), laser focus
MIN. ILLUMINATION	Color 0.1 lux, B/W 0.009 lux (50 IRE, F1.7)
PAN / TILT	360° endless pan, 0 to -90° tilt, up to 500°/s
COMPRESSION	H.264, H.265, AV1 with Axis Zipstream

Camera specifications and product image: AXIS Q6086-E product page and datasheet, Axis Communications (axis.com). Subject to change by the manufacturer.

RESOLUTION

WHY 4MP RESOLUTION MATTERS

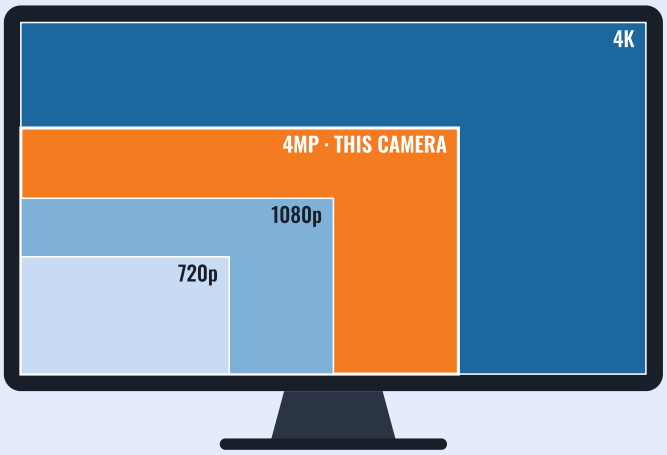

4K UHD	3,840 × 2,160 · 8.29 MP
4MP	2,688 × 1,512 · 4.06 MP
1080p Full HD	1,920 × 1,080 · 2.07 MP
720p HD	1,280 × 720 · 0.92 MP

Resolution is how many pixels the camera captures in every frame. More pixels put more detail on every wave, boat and surfer, so the picture stays sharp when viewers watch on a big TV or zoom in on the player.

At 2688 × 1512, the Q6086-E's 4MP image has about twice the pixels of 1080p (4.06 MP vs 2.07 MP), for noticeably more detail on every subject. With about half of 4K's pixels, it's also a much lighter load to stream, so more viewers get a smooth picture on everyday connections.

THE ENCLOSURE

THE WORLD'S ONLY PATENTED SELF-WIPING, SELF-CLEANING OUTDOOR CAMERA ENCLOSURE



X|CLEAR

Salt spray, rain spots, grime and bugs are the enemies of a great coastal view. The X|Clear keeps your camera's view clear without ladders, cleaning crews or poles.

US PATENT #8567963B1

SELF-CLEANING DOME

- Spray nozzle coats the dome, then it rotates against a fixed wiper blade
- 58 oz reservoir: up to 150 washes (based on settings)

CLIMATE CONTROL

- Integrated 30-watt heat w/ optional 60-watt total heat upgrade
- Redundant circulation fans eliminate hot spots

BUILT FOR SALT AIR

- Nearly indestructible polycarbonate: no rust or corrosion
- Stainless steel, padlock-compatible latches

EASY TO INSTALL

- Wall mount bracket (standard)
- Pole Mount Bracket Available
- Cable entry from below reduces water intrusion




CONTROL FROM ANYWHERE

- Trigger or schedule wash and wipe events from any modern browser, or via the API
- Monitor internal and external temperatures, fluid level, power input and load
- Power each connected device on or off remotely; reboot and power cycle

X|CLEAR KEY SPECS

INPUT POWER	120/240VAC (standard); 10-60VDC (optional)
POE+ & AUX PORTS	[1] 30-watt PoE+ (IEEE 802.3at); [1] 24VDC passive PoE; [2] 12VDC; [2] 24VDC, all remotely controlled; integrated 4-port 10/100Mbps switch
HEAT	Integrated 30-watt heat w/ optional 60-watt total heat upgrade
OPERATING TEMP.	0° to 140°F (-18° to 60°C). Varies with integrated components.
MOUNTING	Wall mount bracket (standard), 2″ x 5.5″ OC hole pattern; pole mount bracket available
SHIPPING SIZE / WT.	19″L x 15″W x 22″H, 24 lbs (with camera installed)

Options (not included): X|DC-INPUT 10-60VDC solar input, X|AUX-RESERVOIR, X|INSULATE, X|PMB pole mount adapter, X|EXT-TEMP external temp probe, X|HALF-SHELF, X|HIGH-CFM fans.

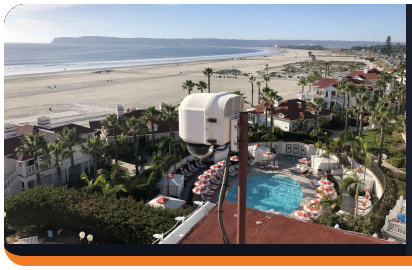

READY FOR A CLEARER COASTAL VIEW?

Tell us about your site and your view. Your HDOnTap coordinator will help you plan the install, and your package arrives tested and ready to go.

CALL 858.481.4096
EMAIL sales@hdontap.com
WEB hdontap.com